


Z006

AIR BLOWN UNIT

Air Blown Unit 2.8mm max. 12F

30.11.2015 ver.6

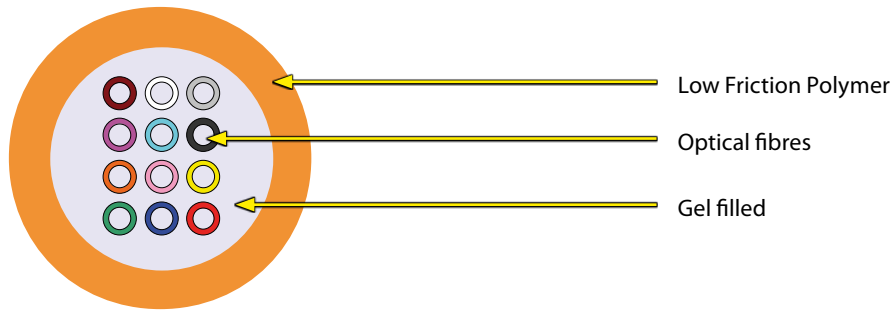

MECHANICAL AND ENVIRONMENTAL PROPERTIES

Test	Value	Unit	Method
Cable outer diameter	2.8 ± 0.1	mm	EN 60811-1-1
Cable weight	8	kg/km	
Outer jacket thickness	0.7	mm	
Coefficient of friction	0.09		
Max. tensile strength	70	N	EN 60794-1-21-E1
Crush resistance test	1000	N	EN 60794-1-21-E3
Impact resistance test	3	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	10	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	15	× OD	EN 60794-1-21-E11b
Moisture resistance test	pass		EN 609794-1-22-F5
Temperature range			
- Installation	-5 to + 50	°C	EN 60794-1-22-F1
- Operation	-20 to + 70		
- Storage	-20 to + 70		

Cable life time – minimum 30 years

FIBRE TYPE

Single mode fiber 9/125
Multi mode fiber 50/125
Multi mode fiber 62.5/125

See the Fibre Specification sheet

FIBRE COLOUR CODING (According to IEC 60304)

1	Red	7	Brown
2	Green	8	Violet
3	Blue	9	Turquoise
4	Yellow	10	Black
5	White	11	Orange
6	Grey	12	Pink

Other fibre colour sequences available on request

SHEAT MARKING

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

PACKING

Packaging	Standard put-up length
Plywood	up to 4100 m *

* length toleration ± 5 %

